

borg&
overström



Distinctive
by design.

b5

borg& overström

A design like no other

The B5 range straddles the line between high-end functionality and ultra-modern design. The unique streamlined design of this range will bring sophistication to any environment.

Reasons to choose

- Optimum height for interaction
- Fully open, illuminated dispense area
- Shrouded faucet for hygienic protection
- Compact, alarmed drainage system
- Built-in leak detector

borgandoverstrom.com



Distinctive
by design.

b5

borg& overström

Water system



Direct Chill

Configuration



Floorstanding

Water options



Chilled



Ambient



Hot



Sparkling

Available colour



Silver

borgandoverstrom.com



Distinctive
by design.

b5

Borg & Overström Totality®



Driven by a relentless pursuit of excellence, Borg & Overström Totality™ is a research and development methodology for the advancement of hygiene, innovation and technology in refreshment systems.



Biofilm, limescale and impact resistant epoxy resin panel finish

Providing an increased level of hygiene and longevity, Fynil™ is a scratch and impact resistant epoxy-resin surface finish - effectively resisting biofilm development and limescale cohesion.



World-class filtration

For the ultimate drinking experience, Borg & Overström appliances can be pre-fitted with a 3M filter to reduce sediment, chlorine, odours and scale.



Laboratory certified 99.999% bacteria-reduced

Every Borg & Overström appliance undergoes an anti-microbial, antipathogen, sanitising procedure. The reassurance of hygienically safe appliances is provided by the unique bacteria-reducing process, Sterizen™.



Ultra-violet sterilising system

For added hygiene confidence, appliances can be fitted with Viovandt™ – an ultra-violet sterilisation process that reduces water-born bacteria.

Distinctive
by design.

B5 models

Power requirements
Hertz 50/Volts 220-240


Chilled temperature
Min 2°C/Max 11°C

Hot temperature
Max 92°C

Throughput litres per hour
Chilled 35/Hot 6

Floorstanding W520xD415xH1310mm	Water system	Dispense height	Max power consumption	Silver
Chilled & Ambient	Direct Chill	250mm	100W	101521
Chilled, Ambient & Sparkling	Direct Chill	250mm	140W	101535
Chilled, Ambient & Hot	Direct Chill	250mm	900W	101541
Chilled, Hot & Sparkling	Direct Chill	250mm	940W	101555

Distinctive
by design.

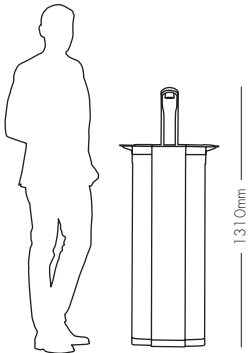

Additions for B5



Printed paper cups

Environmentally-friendly disposable cups designed to fit Borg & Overström cup dispensers perfectly.



Personal drinking bottles

500ml capacity in black or grey frosted softtouch finish. Comes with quick-release leak-proof cap and carry strap.



Deep Sparkle™ CO² refills

Can be disposed via standard steel recycling or general waste. Requires CO² regulator with gauge.



Sanitisation kit

Six monthly sanitising cycles ensure appliances function at the optimum hygiene levels.



Install kit with 3M filter

Install appliances simply and effectively in a wide range of applications. Complete with a 3M filter.



Ultra-violet filter kit

Complete Viovand™ filter kit to assist in water purification and removal of unwanted micro-organisms.



Wall bracket kit

For added security, use the wall bracket set to anchor your watercooler back to the wall. Simple to fit and unobtrusive.



CO² housing

A complete cover to protect and improve aesthetic appeal when using a large refillable CO² cylinder. Ideal for public areas.

Distinctive
by design.

Book a visit to the Borg & Overström Academy
for a personal demonstration of the B5

Talk to an adviser
+44 (0) 1362 695 006
sales@borgandoverstrom.com